

Motorbike



Products & Services

Moto2 | **LIQUI MOLY**
EXCLUSIVE LUBRICANT

Moto3 | **LIQUI MOLY**
EXCLUSIVE LUBRICANT

MXGP

LIQUI MOLY
EXCLUSIVE LUBRICANT
PARTNER



Take off, get out and about and breathe in the feeling of freedom

No matter if on-road or off-road. Whether in a leisurely, enjoyable flow or an infernally fast ride. Whether with a motorcycle, scooter, moped, ATV, trike or cart. Whether with 2 or 4-stroke engine. Reliability is always one of the most important travel companions. And, at the same time, one of the greatest challenges.

For everyone who views biking as the elixir of life, LIQUI MOLY offers the perfect fountain of youth – a comprehensive product range, in a class of its own. The MOTORBIKE product line offers everything from one source. In addition to motor oils and additives, also gear oils, air filter oil, fork oils, care and repair products, chain cleaner, chain oil and even cleaner for helmet visors and leather care for suits.



Simply scan the QR code and go directly to the Motorbike website.



ADDITIVES	4	CARE AND SERVICE PRODUCTS	16
LUBRICANTS	7	Maintenance products for chains	17
Engine oils 4-stroke - street	8	Maintenance products	17
Engine oils 4-stroke - offroad	10	Maintenance products for filters	19
Engine oils 4-stroke - scooter	11	Brake fluids	19
Engine oils 4-stroke - snowmobile	12	Coolants	20
Engine oils 2-stroke - street	12	ACCESSORIES	21
Engine oils 2-stroke - offroad	13	SALES PROMOTION	23
Engine oils 2-stroke - scooter	13		
Engine oils 2-stroke - snowmobile	13		
Gear oils	14		
Fork oils/Shock absorber oils	15		



Additives



Motorbike 4T Bike-Additive/Shooter



Motorbike 2T Bike-Additive



Motorbike Speed Additive/Shooter



Motorbike Gasoline Stabilizer/Shooter

	Motorbike 4T Bike-Additive/Shooter	Motorbike 2T Bike-Additive	Motorbike Speed Additive/Shooter	Motorbike Gasoline Stabilizer/Shooter
Cleaning	●●●	●●●	●●○	○○○
Corrosion Protection	●●○	●●○	●●○	●●●
Ageing protection	○○○	○○○	○○○	●●●
Performance	●○○	●○○	●●●	○○○
Continuous use	●●●	●●●	●●●	●○○



Motorbike MoS₂ Shooter

Reduces friction and wear, thus reducing oil and fuel consumption. Increases the engine's running smoothness and reduces malfunctions.

Area of use

For all 2-stroke engines with separate and mixture lubrication and for all 4-stroke engines, also with wet multi-disk clutch. Also suitable for use in transmissions and final drives. **Dosage:** 20 ml (1 tube) is sufficient for 1 l of motor oil. 2-stroke engines: 10 ml per 10 l of fuel mixture or 20 ml for 1 l of 2-stroke oil. Tested on engines with catalytic converters.

Cont.	Packaging Unit	Part no.
20 ml	24	3444 ⁸⁹
20 ml	24	20555 ¹⁵²
20 ml	24	20561 ⁷⁶
20 ml	24	20563 ⁷¹



Motorbike Oil Additive



Engine wear protection based on molybdenum disulfide (MoS₂). Scientifically proven reduction in rate of wear up to 50 %. Extends the engine's service life. The engine runs smoother, the oil and fuel consumption are reduced. Increases engine's running smoothness, leads to fewer malfunctions. Tested on engines with catalytic converters.

For all 4-stroke and 2-stroke engines with separate and mixture lubrication. Can be used with wet multi-disk clutches. Recommended dosage at every oil change or, with 2-stroke engines, at every refueling. 4-stroke engines: 30 ml per liter of motor oil or with wet clutch 20 ml. 2-stroke engines with separate lubrication: 20 ml per liter of 2-stroke oil or with mixture lubrication: 10 ml per 10 l of mixture.

125 ml	6	1580 ¹³⁶
125 ml	6	21668 ¹⁰⁹



Motorbike Engine Flush Shooter



Highly effective cleaning fluid. Removes troublesome deposits from inside the engine. Dissolves sludge and lacquer formers. All types of oil-soluble and oil-insoluble residues are brought into suspension and removed during the next oil change. This allows the clean engine and fresh oil to realize their full potential.

Flushes out and cleans the oil circuits of motorcycles with 4-stroke gasoline engines. The frequency of use is dependent on the degree of contamination of the oil circuit and on the quality of the oil used. 80 ml (1 can) is sufficient for 0.8 – 2 l of oil.

80 ml	24	3028 ¹⁵²
80 ml	24	7901 ³⁵
80 ml	24	20562 ⁷⁶
80 ml	24	20597 ⁸⁹
80 ml	24	20920 ⁵⁹



Motorbike Engine Flush

Cleaning fluid for clearing the engine interior of troublesome deposits. Dissolves sludge and lacquer formers. All types of oil-soluble and oil-insoluble residues are brought into suspension and removed during the next oil change. This allows the clean engine and fresh oil to realize their full potential.

Flushes out and cleans the oil circuits of motorcycles with 4-stroke gasoline engines. The frequency of use is dependent on the degree of contamination of the oil circuit and on the quality of the oil used. 250 ml (1 can) is sufficient for up to 4.5 l of oil.

250 ml	6	1657 ¹³⁴
250 ml	6	5922 ¹⁰⁹
250 ml	6	21717 ⁶⁷



Motorbike 4T Shooter

Optimizes the performance of the engine. Removes deposits in the fuel system, on valves, spark plugs and in the combustion chamber and prevents new deposits. This reduces the fuel consumption. Protects the entire fuel system against corrosion. Prevents carburetor icing. Tested on engines with catalytic converters.

Add to fuel for all 4-stroke engines (aspirated and injection). 80 ml is sufficient for 5 – 10 l of fuel. Add every time you refuel.

80 ml	24	3824 ¹⁵²
80 ml	24	7822 ⁸⁹
80 ml	24	7829 ⁶³
80 ml	24	7837 ⁷⁶
80 ml	24	7916 ³⁵
80 ml	24	8292 ⁵⁹
80 ml	24	20587 ⁶⁵
80 ml	24	21371 ³⁴



Motorbike 4T Bike-Additive

Optimizes the performance of the engine. Removes deposits in the fuel system, on valves, spark plugs and in the combustion chamber and prevents new deposits. This reduces the fuel consumption. Protects the entire fuel system against corrosion. Prevents carburetor icing. Tested on engines with catalytic converters.

Add to fuel for all 4-stroke engines (aspirated and injection). 125 ml is sufficient for 15 – 20 l of fuel. Add every time you refuel.

125 ml	6	1581 ¹⁴⁶
125 ml	6	5918 ¹⁰⁹



Motorbike 2T Bike-Additive

Increases the performance of the engine. Removes deposits in the fuel system as well as at intake and exhaust ports and prevents new deposits from forming. Protects the entire fuel system against corrosion. Tested on engines with catalytic converters. Clean engines use less fuel and reduce the pollutant emissions.

Area of use

For all 2-stroke engines with mixture or separate lubrication. Filling the dosage chamber (25 ml) once is sufficient for 5 l of fuel or fuel mixture.

Cont.	Packaging Unit	Part no.
250 ml	6	1582 ¹³⁶



Motorbike Speed Shooter

Modern ash-free combination of agents with acceleration-enhancing, cleaning, dispersing and material-protecting properties. The product has been formulated using state-of-the-art additive and fuel technologies in accordance with the requirements of today's engines, fuels and running conditions. Ensures increased driving enjoyment due to optimized performance. The engine starts easier and also runs smoother.

For 4-stroke and 2-stroke gasoline engines (carburetor and injection). 80 ml sufficient for up to 10 l of fuel. Recommended for use at each refueling.

80 ml	24	3823 ¹⁵²
80 ml	24	7820 ⁸⁹
80 ml	24	7836 ⁷⁶
80 ml	24	7915 ³⁵
80 ml	24	8265 ⁵⁹
80 ml	24	20585 ⁴⁵



Motorbike Speed Additive

Modern ash-free combination of agents with acceleration-enhancing, cleaning, dispersing and material-protecting properties. The product has been formulated using state-of-the-art additive and fuel technologies in accordance with the requirements of today's engines, fuels and running conditions. Ensures increased driving enjoyment due to optimized performance. The engine starts easier and also runs smoother.

Added to the fuel of all 2-stroke and 4-stroke gasoline engines. Contents sufficient to treat up to 20 liters of fuel.

150 ml	6	3040 ¹⁴⁵
150 ml	6	5920 ¹⁴⁷



Motorbike Gasoline Stabilizer Shooter



The perfect dose to temporarily decommission motorcycles, motor scooters, ATVs, snowmobiles and other 2 and 4-stroke gasoline engines or to support the function of infrequently operated engines. Its special formulation preserves and protects fuel from aging and oxidation and prevents corrosion throughout the entire fuel system. The product has a long-term effect.

Suitable for all 2-stroke and 4-stroke gasoline engines – especially for preventive care. Tested for compatibility with turbochargers and catalytic converters. 80 ml is sufficient for 15 l of fuel.

80 ml	24	21600 ¹⁵²
-------	----	----------------------



Motorbike Gasoline Stabilizer

Preserves and protects fuel against aging and oxidation. Prevents corrosion throughout the entire fuel system. Prevents problems from occurring when motorbikes, motor scooters, ATVs, snowmobiles and other gasoline-driven 4-stroke and 2-stroke engines are decommissioned. Increases operational reliability. The product has a long-term effect.

Suitable for all 4-stroke and 2-stroke gasoline engines – especially for preventive care. Tested for turbochargers and catalytic converters. Filling the dosage chamber (25 ml) once is sufficient for 5 l of fuel.

250 ml	6	3041 ¹³⁴
250 ml	6	5921 ¹⁰⁹



Motorbike Performance Set

consisting of:
1 x Motorbike 4T Bike Additive (part no. 1581)
1 x Motorbike Gasoline Stabilizer (part no. 3041)

1 pc	6	3034 ¹⁴⁶
------	---	---------------------



Motorbike Radiator Cleaner

Concentrate for cleaning cooling circuits. Deposits in the cooling/heating system create blockages for heat exchange and they also block thermostat valves and control mechanisms. When engine temperatures are too high, the engine runs uneconomically and suffers excessive wear at considerable risk of damage. Removes deposits containing oil and lime and ensures that the engine runs reliably and at the optimum temperature. Does not contain aggressive acids or alkalis.

Suitable for all coolant circuits. Compatible with all conventional coolant additives and antifreezes. Contents of can are sufficient to treat 5 liters of coolant.

150 ml	6	3042 ¹⁴⁵
150 ml	6	5923 ¹⁴⁷



Motorbike Radiator Stop Leak

Dispersion for sealing leaks in cooling water circuits. The product reliably seals hairline cracks and small leaks. Can be used to prevent the need for repair work on the cooling system. The solids dispersion is stabilized in carrier fluid.

For sealing minor leaks in coolant systems with and without coolant filter. Also suitable for aluminum and plastic radiators. Contents will treat up to 5 liters of coolant.


125 ml	6	3043 ¹⁴⁵
125 ml	6	5924 ¹⁴⁷



Lubricants



Additional
information and the
right operating fluids
for your vehicle
can be found here!

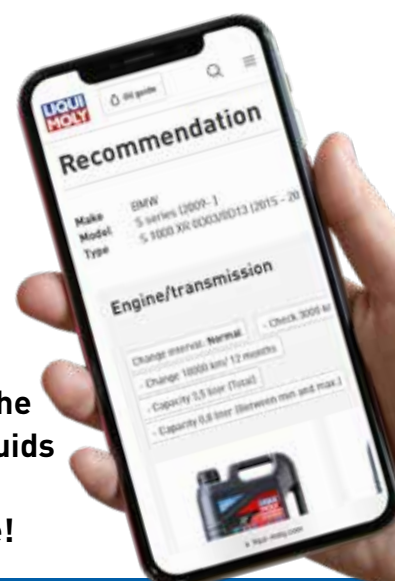

www.liqui-moly.to/oil-guide

5W-40

**Motorbike 4T Synth 5W-40 Street Race**

Fully-synthetic motor oil of supreme quality. Lubricates and protects the engine, optimizes the power output, minimizes wear and ensures excellent cleanliness. As the official motor oil of the Moto2 and Moto3 series, it has proven itself even under extreme conditions. Transports the performance and experience from the racetrack directly to the road. Tested on engines with catalytic converters.

Specifications: API SP, JASO MA2

Ideal for air and water-cooled 4-stroke engines in both racing and road driving. For engines with or without a wet clutch.

Cont.	Packaging Unit	Part no.
1 l	6	1750 ⁵⁹
1 l	6	2592 ⁵¹²
4 l	4	1685 ⁵¹³
20 l	1	2720 ¹⁴⁶
20 l	1	20851 ⁵⁹
60 l	1	2593 ¹⁴⁶
205 l	1	2594 ¹⁴⁶

**Motorbike 4T 5W-40 HC Street**

High-performance motor oil based on synthetic technology. For maximum performance and protection of the engine under all operating conditions. Ensures optimum lubrication, outstanding engine cleanliness, excellent friction values and minimum wear. Guarantees smooth engagement and disengagement as well as gear shifting. Tested on engines with catalytic converters.

Specifications and approvals: API SN PLUS, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to extreme operating conditions. For sporting applications. Suitable for engines with or without a wet clutch.

1 l	6	20750 ⁵¹³
4 l	4	20751 ⁵¹³
20 l	1	21226 ¹⁴⁶
60 l	1	20752 ¹⁴⁶
205 l	1	21122 ¹⁴⁶

10W-30

**Motorbike 4T 10W-30 Street**

High-performance motor oil based on synthetic technology. For optimum lubrication, highest performance and maximum protection of the engine under all operating conditions. Ensures outstanding engine cleanliness, excellent friction values and minimum wear. Tested on engines with catalytic converters.

Specifications: API SP, JASO MA2

For air and water-cooled 4-stroke engines with and without wet clutch. Also suitable for extreme conditions and sporty use.

1 l	6	2526 ⁵⁰²
4 l	4	1688 ⁵¹⁶
20 l	1	3015 ¹⁴⁶
60 l	1	2531 ¹⁴⁶
205 l	1	2544 ¹⁴⁶

10W-40

**Motorbike 4T Synth 10W-40 Street Race**

Fully synthetic high-performance motor oil. For maximum performance and outstanding engine protection under all operating conditions. Offers perfect lubrication, outstanding engine cleanliness, excellent friction and minimum wear. Ensures smooth engagement and disengagement as well as gear shifting, which significantly increases driving pleasure. Tested for use with catalytic converters and on racing machines.

Specifications: API SP, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to extreme operating conditions. Suitable for sporting applications. For engines with or without a wet clutch.

1 l	6	20753 ⁵¹³
4 l	4	20754 ⁵¹³
20 l	1	21339 ¹⁴⁶
60 l	1	20755 ¹⁴⁶
205 l	1	21716 ¹⁴⁶

**Motorbike 4T 10W-40 Street**

High-performance motor oil based on synthetic technology. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction values and minimum wear are just as much par for the course as gentle clutch engagement and disengagement and gear shifting. Tested on engines with catalytic converters.

Specifications: API SP, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to extreme operating conditions. For sporting applications. Suitable for engines with or without a wet clutch.

1 l	6	1521 ⁵¹²
1 l	6	1755 ⁵⁹
4 l	4	1243 ⁵¹²
20 l	1	1562 ¹⁴⁶
60 l	1	1563 ¹⁴⁶
205 l	1	1568 ¹⁴⁶
1000 l	1	21806 ¹⁴⁶

**Motorbike 4T 10W-40 Formula**

High-performance motor oil, developed for use in air-cooled and water-cooled four-stroke motorcycle engines. Selected base oils and high-quality additive components ensure optimum lubrication, outstanding engine cleanliness and excellent friction values in all operating conditions. Tested on engines with catalytic converters.

Specifications: API SP, JASO MA2

Specially developed for year-round use in street and racing machines operated under normal to high load and for scooters. Exceptionally well-suited for use with or without a wet clutch.

800 ml	6	3036 ¹⁴⁶
--------	---	---------------------

**Motorbike Optimal 4T 10W-40**

High-performance motor oil based on selected mineral oils. Ensures optimum performance and protection of the engine under all operating conditions. Reliable lubrication, optimum noise damping and low wear are just as much par for the course as gentle clutch engagement and disengagement and gear shifting. Tested on engines with catalytic converters.

Specifications: API SN, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to tough operating conditions. Suitable for engines with or without a wet clutch.

1 l	6	21862 ⁵⁰⁴
4 l	4	21863 ⁵⁰⁴
20 l	1	21864 ¹⁴⁶
60 l	1	21865 ¹⁴⁶
205 l	1	21866 ¹⁴⁶

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

⁵⁹ JA ¹⁴⁶ DE-EN ⁵⁰² AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-ZH ⁵⁰⁴ AR-BG-CS-DA-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-ZH ⁵¹² AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-ID-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-UK-ZH ⁵¹³ AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-UK-ZH ⁵¹⁶ AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-ID-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-ZH

Fully synthetic
Synthetic technology /
Advanced Full Synthetic
Semi synthetic
Mineral-based

10W-40



Motorbike 4T Top-up Oil 10W-40

High-performance motor oil. Ensures maximum performance and protects the engine under all operating conditions. Guarantees optimum lubrication, outstanding engine cleanliness, excellent friction values, and transmission properties as well as minimum wear. Enables smooth engagement and disengagement as well as gear shifting. Tested on engines with catalytic converters.

Specifications: API SP, JASO MA2

For topping up air and water-cooled 4-stroke engines exposed to normal to intense operating conditions. Suitable for engines with or without wet clutch.

Cont.	Packaging Unit	Part no.
500 ml	6	21980 ¹⁴⁶

10W-50



Motorbike 4T Synth 10W-50 Street Race

Fully synthetic high-performance motor oil. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction values and minimum wear are just as much par for the course as gentle clutch engagement and disengagement and gear shifting. That makes a big difference to driving enjoyment! Tested on engines with catalytic converters. Tested on racing machines.

Specifications: API SP, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to extreme operating conditions. For sporting applications. Suitable for engines with or without a wet clutch.

1 l	6	1502 ⁵¹²
1 l	6	1751 ⁵⁹
4 l	4	1686 ⁵¹²
20 l	1	1567 ¹⁴⁶
20 l	1	20852 ⁵⁹
60 l	1	1564 ¹⁴⁶
205 l	1	1569 ¹⁴⁶



Motorbike 4T 10W-50 Street

High-performance motor oil based on synthetic technology. For maximum performance and protection of the engine under all operating conditions. Ensures optimum lubrication, outstanding engine cleanliness, excellent friction values and minimum wear. Guarantees smooth engagement and disengagement as well as gear shifting. Tested on engines with catalytic converters.

Specifications and approvals: API SN PLUS, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to extreme operating conditions. For sporting applications. Suitable for engines with or without a wet clutch.

1 l	6	21725 ⁵⁰²
4 l	4	21726 ⁵⁰²
20 l	1	21727 ¹⁴⁶
60 l	1	21728 ¹⁴⁶

10W-60



Motorbike 4T Synth 10W-60 Street Race

Fully synthetic high-performance motor oil. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction values and minimum wear are just as much par for the course as gentle clutch engagement and disengagement and gear shifting. That makes a big difference to driving enjoyment! Tested on engines with catalytic converters. Tested on racing machines.

Specifications: API SP, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to extreme operating conditions. For sporting applications. Suitable for engines with or without a wet clutch.

1 l	6	1525 ⁵¹²
4 l	4	1687 ⁵¹³
20 l	1	1527 ¹⁴⁶
60 l	1	2724 ¹⁴⁶
205 l	1	21109 ¹⁴⁶

15W-50



Motorbike 4T 15W-50 Street

High-performance motor oil based on synthetic technology. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction values and minimum wear are just as much par for the course as gentle clutch engagement and disengagement and gear shifting. Tested on engines with catalytic converters.

Specifications: API SP, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to extreme operating conditions. For sporting applications. Suitable for engines with or without a wet clutch.

1 l	6	2555 ⁵¹³
4 l	4	1689 ⁵¹³
20 l	1	2722 ¹⁴⁶
60 l	1	2565 ¹⁴⁶
205 l	1	2566 ¹⁴⁶

20W-50



Motorbike HD Synth 20W-50 Street

Fully synthetic motor oil tailored for use in air and water-cooled 4-stroke motorbike engines, especially suitable for Harley Davidsons. Selected base oils and high-quality additive components ensure optimum lubrication, outstanding engine cleanliness and excellent friction values in all operating conditions.

Specifications: API SP, JASO MA2

LIQUI MOLY recommends this product for vehicles or assemblies for which the following specifications or original spare part numbers are required: Harley-Davidson H-D 360 Motor Cycle Oil 62600042

For a large number of Harley Davidson V-twin engines which specify a synthetic motor oil of 20W-50 viscosity. Exceptionally well-suited for use with or without a wet clutch.

1 l	6	3816 ⁵¹³
1 l	6	20858 ⁵⁹
4 l	4	3817 ⁵¹³
20 l	1	3818 ¹⁴⁶
60 l	1	3819 ¹⁴⁶
205 l	1	3820 ¹⁴⁶

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

⁵⁹ JA ¹⁴⁶ DE-EN ⁵⁰² AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-ZH ⁵¹² AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-ID-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-UK-ZH ⁵¹³ AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-UK-ZH

Fully synthetic
Synthetic technology /
Advanced Full Synthetic
Semi synthetic
Mineral-based

20W-50

**Motorbike 4T 20W-50 Street**

High-performance motor oil based on selected mineral oils. Ensures optimum performance and protection of the engine under all operating conditions. Reliable lubrication, optimum noise damping and low wear are just as much par for the course as gentle clutch engagement and disengagement and gear shifting. Tested on engines with catalytic converters.

Specifications: API SP, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to tough operating conditions. Suitable for engines with or without a wet clutch.

Cont.	Packaging Unit	Part no.
1 l	6	1500 ⁵¹³
1 l	6	20855 ⁵⁹
4 l	4	1696 ⁵¹³
20 l	1	1560 ¹⁴⁶
60 l	1	1561 ¹⁴⁶
205 l	1	3829 ¹⁴⁶

**Motorbike Optimal 4T 20W-50**

Proven motor oil based on selected mineral oils. Gives reliable protection to the engine. Guarantees reliable lubrication even under extreme conditions. Optimum noise damping and good wear protection are just as standard as gentle clutch engagement and disengagement and gear shifting. Tested on engines with catalytic converters.

Specifications: API SN, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to tough operating conditions. Suitable for engines with or without a wet clutch.

1 l	6	21867 ⁵⁰⁴
4 l	4	21868 ⁵⁰⁴
20 l	1	21869 ¹⁴⁶
60 l	1	21870 ¹⁴⁶
205 l	1	21871 ¹⁴⁶

SAE 50

**Motorbike HD-Classic SAE 50 Street**

Single-grade motor oil. For usage in classical bikes. Especially suited for Harley Davidson. High-wear resistance and outstanding corrosion protection. Absolute shear stability. Guarantees smooth engine running and a long engine service life. Lower evaporative losses and oil consumption.

Specifications and approvals: API SG

For 4-stroke engines, especially for Harley-Davidson. Can be mixed with all commercially available motor oils.

1 l	6	1572 ⁵¹³
4 l	4	1230 ⁵¹³

ENGINE OILS 4-STROKE - OFFROAD

5W-40

**Motorbike 4T Synth 5W-40 Offroad Race**

Fully synthetic high-performance motor oil. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction values and minimum wear are just as much par for the course as gentle clutch engagement and disengagement and gear shifting. That makes a big difference to driving enjoyment! Tested on engines with catalytic converters. Tested on racing machines.

Specifications: API SP, JASO MA2

Specially developed for air and water-cooled 4-stroke engines exposed to extreme loads off-road. For the sporty driver. Suitable for Enduro and motocross motorbikes, ATVs, SxS and snowmobiles with and without a wet clutch.

1 l	6	3018 ⁵¹³
4 l	4	3019 ⁵¹³

10W-40

**Motorbike 4T 10W-40 Offroad**

High-performance motor oil based on synthetic technology. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction values and minimum wear are just as much par for the course as gentle clutch engagement and disengagement and gear shifting. Tested on engines with catalytic converters.

Specifications: API SP, JASO MA2

Specially developed for air and water-cooled 4-stroke engines exposed to extreme loads off-road. For the sporty driver. Suitable for Enduro and motocross motorbikes, ATVs, SxS and snowmobiles with and without a wet clutch.

1 l	6	3055 ⁵¹³
4 l	4	3056 ⁵⁰²

**Motorbike 4T 10W-40 Basic Offroad**

High-performance motor oil based on selected mineral oils. Ensures optimum performance and protection of the engine under all operating conditions. Reliable lubrication, optimum noise damping and low wear are just as much par for the course as gentle clutch engagement and disengagement and gear shifting. Tested on engines with catalytic converters.

Specifications: API SP, JASO MA2

Specially developed for air and water-cooled 4-stroke engines exposed to increased loads off-road. Suitable for Enduro and motocross motorbikes, quads, SxS and snowmobiles with and without a wet clutch.

1 l	6	3059 ⁵¹³
4 l	4	3062 ⁵¹³

10W-50

**Motorbike 4T Synth 10W-50 Offroad Race**

Fully synthetic high-performance motor oil. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction values and minimum wear are just as much par for the course as gentle clutch engagement and disengagement and gear shifting. That makes a big difference to driving enjoyment! Tested on engines with catalytic converters. Tested on racing machines.

Specifications: API SP, JASO MA2

Specially developed for air and water-cooled 4-stroke engines exposed to extreme loads off-road. For the sporty driver. Suitable for Enduro and motocross motorbikes, ATVs, SxS and snowmobiles with and without a wet clutch.

1 l	6	3051 ⁵¹³
4 l	4	3052 ⁵¹³

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

⁵⁹ JA ¹⁴⁶ DE-EN ⁵⁰² AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-ZH ⁵⁰⁴ AR-BG-CS-DA-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-ZH ⁵¹³ AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-UK-ZH

Fully synthetic
Synthetic technology /
Advanced Full Synthetic
Semi synthetic
Mineral-based

ENGINE OILS 4-STROKE - OFFROAD



10W-60



Motorbike 4T Synth 10W-60 Offroad Race

Fully synthetic high-performance motor oil. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction values and minimum wear are just as much par for the course as gentle clutch engagement and disengagement and gear shifting. That makes a big difference to driving enjoyment! Tested on engines with catalytic converters. Tested on racing machines.

Specifications: API SP, JASO MA2

Specially developed for air and water-cooled 4-stroke engines exposed to extreme loads off-road. For the sporty driver. Suitable for Enduro and motocross motorbikes, ATVs, SxS and snowmobiles with and without a wet clutch.

Cont.	Packaging Unit	Part no.
1 l	6	3053 ⁵¹³
4 l	4	3054 ⁵¹³

15W-50



Motorbike 4T 15W-50 Offroad

High-performance motor oil based on synthetic technology. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction values and minimum wear are just as much par for the course as gentle clutch engagement and disengagement and gear shifting. Tested on engines with catalytic converters.

Specifications: API SP, JASO MA2

Specially developed for air and water-cooled 4-stroke engines exposed to extreme loads off-road. For the sporty driver. Suitable for Enduro and motocross motorbikes, ATVs, SxS and snowmobiles with and without a wet clutch.

1 l	6	3057 ⁵¹³
4 l	4	3058 ⁵¹³

ENGINE OILS 4-STROKE - SCOOTER

0W-30



Motorbike 4T 0W-30 Scooter

High-performance motor oil based on synthetic technology. Ensures maximum performance and protects the engine under all operating conditions. Guarantees optimum lubrication, outstanding engine cleanliness, excellent friction values and minimum wear.

Specifications and approvals: ACEA A5, ACEA B5

Specially developed for water-cooled 4-stroke engines under normal to heavy load.

1 l	6	21153 ⁵⁰²
-----	---	----------------------

5W-30



Motorbike Molygen 4T 5W-30 Scooter

High-performance motor oil based on synthetic technology. With an innovative recipe and the added bonus of the special Molygen additive. Ensures the best possible protection and retention of engine value as well as perfect lubrication and maximum performance under all operating conditions. Prevents the formation of deposits, lowers frictional losses in the engine and considerably reduces wear. This extends the engine's service life and reduces consumption. Tested on engines with catalytic converters.

Specifications and approvals: API SN PLUS

LIQUI MOLY recommends this product for vehicles or assemblies for which the following specifications or original spare part numbers are required: JASO MB

For air and water-cooled 4-stroke scooter engines with dry clutch, automatic or Variomatic transmission that require a lubricant of this specification. Suitable for normal to extreme operating conditions.

800 ml	6	21895 ¹⁴⁶
1 l	6	21718 ⁵⁰⁴

5W-40



Motorbike 4T 5W-40 HC Scooter

High-performance motor oil based on synthetic technology. Offers maximum performance and reliable engine protection under all operating conditions. Ensures optimum lubrication, outstanding engine cleanliness, excellent friction values and minimum wear.

Specifications and approvals: API SN PLUS, JASO MA2

LIQUI MOLY recommends this product for vehicles or assemblies for which the following specifications or original spare part numbers are required: Kymco, Piaggio

For air and water-cooled 4-stroke engines. Ideally suited for both normal and extreme use with sporty drivers.

1 l	6	20829 ⁵¹³
-----	---	----------------------

10W-40



Motorbike 4T 10W-40 Scooter Race

Fully synthetic high-performance motor oil. Ensures maximum performance and protection of the engine under all operating conditions. Optimum lubrication, outstanding engine cleanliness, excellent friction values and minimum wear are just as much par for the course as gentle clutch engagement and disengagement and gear shifting. That makes a big difference to driving enjoyment! Tested on engines with catalytic converters. Tested on racing machines.

Specifications: API SP, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to extreme operating conditions. For sporting applications. Suitable for engines with or without a wet clutch.

1 l	6	20826 ⁵⁰⁹
-----	---	----------------------

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

¹⁴⁶ DE-EN ⁵⁰² AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-ZH ⁵⁰⁴ AR-BG-CS-DA-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-ZH ⁵⁰⁹ AR-BG-CS-DA-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-ZH ⁵¹³ AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-ZH

Fully synthetic
Synthetic technology /
Advanced Full Synthetic
Semi synthetic
Mineral-based



ENGINE OILS 4-STROKE - SCOOTER



10W-40



Motorbike Molygen 4T 10W-40 Scooter

High-performance motor oil based on synthetic technology. With an innovative recipe and the added bonus of the special Molygen additive. Ensures the best possible protection and retention of engine value as well as perfect lubrication and maximum performance under all operating conditions. Prevents the formation of deposits, lowers frictional losses in the engine and considerably reduces wear. This extends the engine's service life and reduces consumption. Tested on engines with catalytic converters.

Specifications and approvals: API SN PLUS, JASO MB

For air and water-cooled 4-stroke scooter engines with dry clutch, automatic or Variomatic transmission that require a lubricant of this specification. Suitable for normal to extreme operating conditions.

Cont.	Packaging Unit	Part no.
800 ml	6	21896 ¹⁴⁶
1 l	6	21719 ⁵⁰⁴



Motorbike 4T 10W-40 Scooter MB

High-performance motor oil for 4-stroke scooters with a dry clutch and separately lubricated transmission. For maximum performance and outstanding engine protection under all operating conditions. Ensures reliable lubrication, optimal noise damping, and minimal wear. The JASO MB specification denotes a particularly friction-reducing property.

Specifications: API SP, JASO MB

For air and water-cooled 4-stroke engines exposed to normal to difficult operating conditions.

1 l	6	20832 ⁵⁰²
-----	---	-----------------------------



Motorbike 4T 10W-40 Scooter MB Formula

High-performance motor oil for 4-stroke scooters with a dry clutch and separately lubricated transmission. For maximum performance and outstanding engine protection under all operating conditions. Ensures reliable lubrication, optimal noise damping, and minimal wear. The JASO MB specification denotes a particularly friction-reducing property.

Specifications: API SP, JASO MB

For air and water-cooled 4-stroke engines exposed to normal to difficult operating conditions.

800 ml	6	21458 ¹⁴⁶
--------	---	-----------------------------



Motorbike 4T 10W-40 Scooter

High-performance motor oil based on selected mineral oils. Ensures optimum performance and protection of the engine under all operating conditions. Reliable lubrication, optimum noise damping and low wear go without saying. Tested on engines with catalytic converters.

Specifications: API SL, JASO MA2

Developed for air and water-cooled 4-stroke engines exposed to normal to tough operating conditions.

1 l	6	1618 ⁵¹²
-----	---	----------------------------

ENGINE OILS 4-STROKE - SNOWMOBILE

0W-40



Snowmobil Motoroil 0W-40

Fully synthetic low-friction motor oil. Ensures the fastest oil penetration of the engine and optimum lubrication starting with the first turn of the engine. Has low viscosity and high shear stability thanks to synthetic base oils with advanced additive technology. Reliably prevents deposits, reduces frictional losses of the engine and contributes to maximum wear reduction.

Specifications and approvals: ACEA A3, ACEA B4, API SN, API CF

Specially adapted to the requirements of 4-stroke engines in snowmobiles. Tested on engines with catalytic converters.

1 l	12	7520 ⁵⁰⁴
4 l	4	2261 ⁵⁰⁴
205 l	1	9048 ¹⁴⁶

ENGINE OILS 2-STROKE - STREET



2T Motoroil Race Tec

High-performance 2-stroke motor oil on an ester basis. Specially adapted to the extreme demands of sports and racing. Approved by the FIA for karting. Can be used for fuels of any kind, except methanol, etc.

Specifications and approvals: API TC, ISO L-EGD, JASO FD

For self-mixing (mixed lubrication) in air and water-cooled 2-stroke engines on motocross and street bikes, karts, scooters, etc.

1 l	6	21633 ¹⁴⁶
-----	---	-----------------------------



Motorbike 2T Synth Street Race

Fully synthetic high-performance motor oil. Ensures maximum performance, lubrication, wear protection and engine cleanliness under all operating conditions. Offers excellent friction values, low smoke development and thus significantly increases the driving pleasure. Tested on engines with catalytic converters. Tested on racing machines.

Specifications and approvals: API TC, Husqvarna, ISO L-EGD, JASO FD

For separate and mixture lubrication systems in air- and water-cooled 2-stroke engines. Specifically for sporting applications. Self-mixing. Mixture ratio up to 1:100 according to the manufacturer's instructions.

1 l	6	1505 ⁵¹³
20 l	1	1566 ¹⁴⁶

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

¹⁴⁶ DE-EN ⁵⁰² AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-ZH ⁵⁰⁴ AR-BG-CS-DA-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-ZH ⁵¹² AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-ID-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-UK-ZH ⁵¹³ AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-UK-ZH

Fully synthetic
 Synthetic technology /
 Advanced Full Synthetic
 Semi synthetic
 Mineral-based

ENGINE OILS 2-STROKE - STREET



Motorbike 2T Street

Semi-synthetic high-performance motor oil. Ensures optimum performance, lubrication and engine cleanliness as well as maximum wear protection under all operating conditions. Offers excellent friction values and low smoke emissions. Tested on engines with catalytic converters.

Specifications and approvals: API TC, ISO L-EGC, JASO FC, TISI (Thailand International Standards Institute)

For air and water-cooled 2-stroke engines with separate and mixture lubrication. For sporting applications. Self-mixing. Mixture ratio up to 1:50 according to the manufacturer's instructions.

Cont.	Packaging Unit	Part no.
1 l	6	1504 ⁵⁰²
20 l	1	1565 ¹⁴⁶

ENGINE OILS 2-STROKE - OFFROAD



Motorbike 2T Synth Offroad Race

Fully synthetic high-performance motor oil. Ensures maximum performance, lubrication, wear protection and engine cleanliness under all operating conditions. Offers excellent friction values, low smoke development and thus significantly increases the driving pleasure. Tested on engines with catalytic converters. Tested on racing machines.

Specifications and approvals: API TC, Husqvarna, ISO L-EGD, JASO FD

For separate and mixture lubrication systems in air- and water-cooled 2-stroke engines. Specifically for Enduro and motocross bikes, ATVs, SxS and snowmobiles. Self-mixing. Mixture ratio up to 1:100 according to the manufacturer's instructions.

1 l	6	3063 ⁵⁰²
4 l	4	3064 ⁵⁰²



Motorbike 2T Offroad

Semi-synthetic high-performance motor oil for Enduro and motocross bikes, ATVs, SxS and snowmobiles. Ensures optimum performance, lubrication, wear protection and engine cleanliness under all operating conditions. Offers excellent friction values and low smoke emissions. Tested on engines with catalytic converters.

Specifications and approvals: API TC, ISO L-EGC, JASO FC, TISI (Thailand International Standards Institute)

For air and water-cooled 2-stroke engines with separate and mixture lubrication. Specially for sporty off-road use. Self-mixing. Mixture ratio up to 1:50 according to the manufacturer's instructions.

1 l	6	3065 ⁵⁰²
4 l	4	3066 ⁵⁰²

ENGINE OILS 2-STROKE - SCOOTER



Motorbike 2T Synth Scooter Race

Fully synthetic high-performance motor oil. Ensures maximum performance, lubrication, wear protection and engine cleanliness under all operating conditions. Offers excellent friction values, low smoke development and thus significantly increases the driving pleasure. Tested on engines with catalytic converters. Tested on racing machines.

Specifications and approvals: API TC, Husqvarna, ISO L-EGD, JASO FD

For air and water-cooled 2-stroke engines with separate and mixture lubrication. Specifically for sporting applications. Self-mixing. Mixture ratio up to 1:100 according to the manufacturer's instructions.

1 l	6	1053 ⁵¹³
-----	---	---------------------



Motorbike 2T Semisynth Scooter

Semi-synthetic high-performance motor oil. Ensures maximum performance, lubrication, wear protection and engine cleanliness under all operating conditions. Offers excellent friction values and low smoke emissions. Tested on engines with catalytic converters.

Specifications and approvals: API TC, ISO L-EGC, JASO FC, TISI (Thailand International Standards Institute)

For air and water-cooled 2-stroke engines. Also for sporting applications. Suitable for engines with separate and mixture lubrication. Self-mixing. Mixing ratio up to 1:50 in accordance with the operating instructions.

1 l	6	1621 ⁵⁰²
-----	---	---------------------



Motorbike 2T Basic Scooter

High-performance motor oil based on selected mineral oils. Guarantees reliable lubrication and wear protection under normal operating conditions.

Specifications and approvals: API TC, ISO L-EGC, JASO FB

For air and water-cooled 2-stroke engines with separate and mixture lubrication. Self-mixing. Mixture ratio up to 1:50 according to the manufacturer's instructions.

1 l	6	1619 ⁵¹³
4 l	4	1237 ¹³⁶
60 l	1	1633 ¹⁴⁶

ENGINE OILS 2-STROKE - SNOWMOBILE



Snowmobil Motoroil Synthetic 2T

Fully synthetic 2-stroke motor oil with modern, specially selected high-quality additives. It meets the toughest requirements in the 2-stroke motor oil range. Specially developed for air and water-cooled snowmobiles with separate and mixture lubrication. Guarantees optimum lubrication, thus allowing the engine to run with minimal wear, under all operating conditions even in extreme cold.

Specifications and approvals: API TC, ISO L-EGD, JASO FD

Depending on the manufacturer's specifications, this 2-stroke motor oil can also be used for mixing ratios up to 1:100. Self-mixing. Specially developed for air and water-cooled snowmobiles with separate and mixture lubrication. This motor oil is also ideal for E-Tec engines.









1 l	6	2382 ⁵⁰⁴
4 l	4	2246 ⁵⁰⁴

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.





¹³⁶ DE-EN-ES-IT-PT ¹⁴⁶ DE-EN ⁵⁰² AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-ZH ⁵⁰⁴ AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-ZH ⁵¹³ AR-BG-CS-DA-DE-EL-EN-ES-FI-FR-HR-HU-IT-KK-NL-NO-PL-PT-RO-RU-SK-SV-TR-ZH

Fully synthetic
Synthetic technology /
Advanced Full Synthetic
Semi synthetic
Mineral-based



			Cont.	Packaging Unit	Part no.
	Motorbike Gear Oil 10W-30	High-pressure gear oil of API GL-4 performance class based on selected base oils and multifunctional additives. For universal use in a number of transmissions and final drives.	For transmissions and final drives operating under normal and high load. Note the transmission manufacturer's instructions.	1 l	6 3087 ⁵⁰³
	Specifications and approvals: API GL4				
	Motorbike Gear Oil 10W-40	High-performance high-pressure gear oil based on synthetic technology. With multi-functional additives for use in a wide range of transmissions and drives. Guarantees easy shifting operations.	For vehicles operating under normal to high load. Suitable for transmissions with separate transmission lubrication and a wet clutch.	1 l	6 21753 ⁵⁰³
	Specifications and approvals: API GL4				
	Motorbike Gear Oil (GL4) 80W	Mineral-based transmission oil of API GL-4 performance class based on selected base oils and additives. Ensures easy, precise shifting operations.	For transmissions and final drives operating under high load. Note the transmission manufacturer's instructions.	500 ml	6 1617 ⁵⁰³
	Specifications and approvals: API GL4, MIL-L 2105, ZF TE-ML 02B, ZF TE-ML 17A				
	Motorbike Gear Oil 80W-90	Mineral high-pressure gear oil of API GL-4 performance class based on selected base oils and multifunctional additives. For universal use in a number of transmissions and final drives.	For transmissions and final drives operating under normal and high load. Note the transmission manufacturer's instructions.	1 l	6 3821 ⁵⁰³
	Specifications and approvals: API GL4				
	Motorbike Gear Oil (GL4) 80W-90 Scooter	High-performance high-pressure gear oil made from carefully selected base oils and multifunctional additives. The oil can therefore be used in a wide range of transmissions and drives.	For transmissions and final drives operating under normal to high load.	150 ml	6 1680 ¹³⁶
	Specifications and approvals: API GL4, MIL-L 2105			150 ml	6 5929 ¹⁰⁹
	Motorbike Gear Oil 75W-90	Fully synthetic high-pressure gear oil of API GL-5 performance class based on high-quality base oils and additives. Ensures easy, precise shifting operations and offers outstanding wear protection and optimum viscosity-temperature properties, even under extreme conditions.	For transmissions and final drives operating under maximum load. Note the transmission manufacturer's instructions.	500 ml	6 1516 ⁵⁰³
	Specifications and approvals: API GL5, MIL-L 2105 C, MIL-L 2105 D			1 l	6 3825 ¹³⁶
	Motorbike Gear Oil 75W-140 (GL5)	Fully synthetic high-pressure gear oil of API GL-5 performance class based on high-quality base oils and additives. Ensures easy, precise shifting operations and offers outstanding wear protection and optimum viscosity-temperature properties, even under extreme conditions.	For transmissions and final drives operating under maximum load. Note the transmission manufacturer's instructions.	20 l	1 3826 ¹⁴⁶
	Specifications and approvals: API GL5				
	Motorbike Gear Oil HD 150	Special fully-synthetic gear oil for primary drives and/or manual transmissions on Harley-Davidson motorcycles. Guarantees optimum lubrication in all temperature ranges and ideal pressure resistance.	Suitable for primary chain drives and clutches for most Harley-Davidson models. Note: Not suitable for models with primary belt drives.	1 l	6 3822 ⁵⁰⁸

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

Fully synthetic 
 Synthetic technology / 
 Advanced Full Synthetic
 Semi synthetic 
 Mineral-based 



Motorbike Fork Oil 5W light

Fully synthetic fork and shock absorber oil with optimized responsiveness. Also includes suitability for the fork oil requirement SAE 4W through SAE 2.5W. Prevents the formation of foam and the hardening of seals. Offers good corrosion and wear protection for high operating reliability.

Universal use in telescopic forks and shock absorbers on motorbikes, mopeds, motor-assisted bicycles and other two-wheelers.

Cont.	Packaging Unit	Part no.
500 ml	6	1523 ¹³⁶
500 ml	6	5950 ¹⁰⁹
1 l	6	2716 ¹³⁶
1 l	6	20747 ¹⁵⁸
5 l	4	1623 ¹³⁶
20 l	1	3016 ¹⁴⁶



Motorbike Fork Oil 7,5W medium/light

Fully synthetic fork and shock absorber oil. Reduces shearing losses and guarantees reliable drivability, even after lengthy periods of use. Prevents the formation of foam and the hardening of seals. Good corrosion and wear protection ensures a long service life.

Universal use in telescopic forks and shock absorbers on motorbikes, mopeds, motor-assisted bicycles and other two-wheelers.

500 ml	6	3099 ¹³⁶
500 ml	6	5940 ¹⁰⁹
1 l	6	2719 ¹³⁶



Motorbike Fork Oil 10W medium

Fully synthetic fork and shock absorber oil. Reduces shearing losses and guarantees reliable drivability, even after lengthy periods of use. Prevents the formation of foam and the hardening of seals. Good corrosion and wear protection ensures a long service life.

Universal use in telescopic forks and shock absorbers on motorbikes, mopeds, motor-assisted bicycles and other two-wheel vehicles.

500 ml	6	1506 ¹³⁶
500 ml	6	5952 ¹⁰⁹
1 l	6	2715 ¹³⁶
1 l	6	20748 ¹⁶¹
5 l	4	1606 ¹³⁶
5 l	4	5953 ¹⁴⁷
20 l	1	3828 ¹⁴⁶



Motorbike Fork Oil 15W heavy

Fully synthetic fork and shock absorber oil. Reduces shearing losses and guarantees reliable drivability, even after lengthy periods of use. Prevents the formation of foam and the hardening of seals. Good corrosion and wear protection ensures a long service life.

Universal use in telescopic forks and shock absorbers on motorbikes, mopeds, motor-assisted bicycles and other two-wheelers.

500 ml	6	1524 ¹³⁶
500 ml	6	5954 ¹⁰⁹
1 l	6	2717 ¹³⁶



Motorbike Shock Absorber Oil Race

Fully synthetic shock absorber oil. Prevents the build-up of deposits and reduces friction and wear. Suppresses foaming even under the toughest operating conditions. Absolutely compatible with gaskets. The unique formulation ensures a better feeling of contact between the tires and the road, and thus more riding fun and safety.

For universal use in shock absorbers of motorbikes, mopeds and other two-wheelers in the racing segment.

1 l	6	20972 ¹³⁶
-----	---	-----------------------------



Motorbike Shock Absorber Oil

Mineral shock absorber oil. Prevents the build-up of deposits and reduces friction and wear. Suppresses foaming even under the toughest operating conditions. Absolutely compatible with gaskets. The unique formulation ensures a better feeling of contact between the tires and the road, and thus more riding fun and safety.

Universal use in shock absorbers on motorbikes, mopeds, motor-assisted bicycles and other two-wheelers.

1 l	6	20960 ¹³⁶
-----	---	-----------------------------



Care and service products



Chain Spray white



Chain Spray



Chain Spray Race



Chain Spray Offroad

	Chain Spray white	Chain Spray	Chain Spray Race	Chain Spray Offroad
Color	white	transparent	red	green
Wear protection	●●○	●●○	●●●	●●○
Susceptibility to dirt	●○○	●●○	●○○	●●●
Spin-off behavior	●●○	●●○	●●●	●○○
Adhesion	●●○	●○○	●●●	●○○
Corrosion protection	●●○	●●○	●●●	●●○
Penetrability	●○○	●●○	●●○	●●●



Motorbike Chain and Brake Cleaner

Special cleaner with a combination of selected solvents. For the rapid, efficient cleaning and degreasing of structural components on two-wheelers.

Area of use

For cleaning chains with and without O/X-rings on two-wheelers and ATVs as well as drum and disk brake systems, their brake pads and components as well as brake calipers.

Cont.	Packaging Unit	Part no.
500 ml	6	1602 ¹³⁴
500 ml	6	5964 ¹⁰⁹
500 ml	6	20742 ¹⁶¹
500 ml	12	20938 ⁵⁹



Motorbike Chain Spray

Fully synthetic, adherent and waterproof chain spray with a wide application range. Suitable for both on- and off-road driving. Offers an outstanding creep and lubricating effect, reduces chain elongation, and extends the chain's service life. With complex ester technology.

For initial and maintenance lubrication of power-transmission chains with and without O-rings and X-rings.

250 ml	12	1508 ¹⁴⁵
250 ml	12	5962 ¹⁰⁹
250 ml	12	20741 ¹⁶¹
250 ml	12	20937 ⁵⁹
400 ml	6	21714 ¹³⁴
400 ml	6	21715 ¹⁴⁷



Motorbike Chain Spray white



Fully synthetic chain spray for optimum lubrication through visible white, ceramic application to the chain. Offers good adhesion properties, low spin-off, and reliable wear and corrosion protection, even with adverse environmental influences such as splash water and road dirt. Reduces chain elongation and extends the chain's service life. Before use, clean the chain with Motorbike Chain and Brake Cleaner (part no. 1602).

For all motorcycle chains with and without O-rings and X-rings.

50 ml	24	1592 ¹⁴⁶
400 ml	12	1591 ¹³⁴
400 ml	12	5981 ¹⁰⁹



Motorbike Chain Spray Offroad

High-performance chain spray for extreme loads in the offroad sector. Provides ideal chain protection against dirt deposits under dusty and muddy conditions. The combination of highly effective solid lubricants and complex ester technology provide excellent wear protection, ensuring minimum friction and maximum chain service life. Offers optimum creep properties and outstanding corrosion protection. Colored green. Before use, clean the chain with Motorbike Chain and Brake Cleaner (part no. 1602).

For all motorcycles with chain drive, particularly in the offroad sector. Especially for motorcycles with high performance and high torque. Suitable for all types of chains (O-/X-/Z-rings).

400 ml	6	21930 ¹³⁴
--------	---	-----------------------------



Motorbike Chain Spray Race

High-performance chain spray for extreme loads, e.g. in racing, on mountain passes, and for fast-running chains. Its combination of ceramic solid lubricants and top-class wear protection guarantees minimum friction and maximum chain life. Offers optimum creep properties and outstanding corrosion protection. Due to excellent adhesion and above all the low spin-off, the chain surroundings remain clean. Colored red. Before use, clean the chain with Motorbike Chain and Brake Cleaner (part no. 1602).

For all motorcycles with chain drive. Especially for motorcycles with high performance and high torque. Suitable for all types of chains (O-/X-/Z-rings).

400 ml	6	21764 ¹³⁴
--------	---	-----------------------------

MAINTENANCE PRODUCTS



Motorbike Cleaner

Cleans motorcycles, motor scooters, ATVs and snowmobiles quickly, thoroughly and gently. Removes even stubborn dirt. Free of solvents that harm the environment.

For cleaning motorcycles, motor scooters, ATVs, snowmobiles, etc.

1 l	6	1509 ¹³⁹
1 l	6	20746 ¹⁵⁸
5 l	1	3037 ¹³⁹



Motorbike Detailer

For quick paintwork care for intermediate use. Removes light soiling such as dust or water spots and leaves a nice shine. Seals smooth paintwork for several weeks and provides an excellent water repellent effect as well as long-lasting protection against aggressive environmental influences. Maintains the cleaning finish for an extended period and reduces the adhesion of dirt. With a pleasantly fruity scent.

For all smooth paintwork on motorcycles, mopeds, motor-assisted bicycles, motor scooters, ATVs, etc. Can also be used on smooth plastic surfaces as well as painted rims. Not suitable for matt painted surfaces.

500 ml	6	21680 ¹⁴⁶
--------	---	-----------------------------



Motorbike Gloss Spray Wax

Wax ensures a high-gloss mirror finish and freshens up paintwork superbly. Light road grime and greasy contaminants are effortlessly and quickly removed without leaving scratches. Due to its extremely light polishing action (like wiping off dust), gives all types of paint and color finishes a smooth surface with high gloss and real depth of color. The protective layer left behind smooths out scratches and protects the paint from the weather.

An outstanding product for quickly sprucing up paintwork. Optimum sealing properties for paint surfaces to protect against the weather. For colored and metallic paints, new or appropriately prepared as well as for quickly preparing new and used vehicles in the show room.

400 ml	6	3039 ¹³⁴
--------	---	----------------------------



Motorbike Multispray

Lubricates, removes rust and protects the bike. Ensures long-term smooth running of moving parts such as Bowden cables. Releases firmly rusted screws/bolts. Protects the entire electrical system. Prevents squealing noise. Protects against corrosion and preserves rubber parts. With outstanding penetration properties.

Area of use

The outstanding and many-faceted properties lead to a wide range of applications in the workshop and on motor vehicles and two-wheelers.

Cont.	Packaging Unit	Part no.
200 ml	12	1513 ¹³⁶
200 ml	12	20743 ¹⁶¹
200 ml	12	21722 ¹⁴⁷



Motorbike Leather Suit Care

Treatment emulsion made of high-quality substances. Gives leather surfaces a silky, lustrous protective layer with a waterproofing effect. Preserves the appearance and feel of the leather and protects against everyday dirt and wear. Prevents premature fading and extends the life of the leather. Smooths slightly worn leather surfaces and makes them more supple.

For all leather surfaces made of smooth leather such as seats, saddlebags, leather suits, etc.

250 ml	6	1601 ¹³⁹
--------	---	---------------------



Motorbike Helmet Interior Cleaner

Cleans gently and thoroughly. Within a short time (approx. 10 minutes) removes the unpleasant odors that are caused by bacteria and mold. Forms a protective film that prevents rapid recontamination.

For cleaning helmet padding, visors, trim, dual seats, etc.

300 ml	12	1603 ¹³⁴
300 ml	12	5963 ¹⁰⁹



Motorbike Visor Cleaner

Preserves and cleans helmets, visors and protective goggles. Active anti-misting agent for common glass and plastic surfaces. The product has a long-term effect. Removes dirt, insects, oil and silicone layers. For a clear view and increased safety.

Used especially for cleaning, care and anti-misting for common glass and plastic surfaces.

100 ml	12	1571 ¹⁴⁶
100 ml	12	5983 ¹⁰⁹



Motorbike Tire Inflator and Sealer

First Aid for punctures while on the go. Seals punctured tires and inflates them again.

For all tire sizes with or without inner tube. Do not use where the tube is ripped or where tire has slipped off the rim or tire has been cut at the side.

300 ml	12	1579 ¹⁴⁵
300 ml	12	5982 ¹¹⁰



Lock Care & De-Icer

Specially developed for lubrication and care of installed lock cylinders and ignition locks. By using this care spray, moving parts will always operate smoothly. De-ices frozen door locks.

For the lubrication, care and de-icing of door locks, door hinges and mechanical side mirrors.

50 ml	24	1528 ¹⁵²
50 ml	24	21925 ⁸⁹



Microfiber Cloth



Universally applicable microfiber cloth for cleaning and care of almost all surfaces. Ensures a streak-free finish on smooth materials such as plastic, glass, stainless steel or sealed wooden surfaces. Washable up to 95 °C without fabric softener.

For the cleaning and care of a variety of surfaces.

1 pc	10	1651 ¹³⁶
------	----	---------------------



Super Soft Microfiber Cloth



High-quality, long-fiber, particularly fluffy microfiber cloth for wiping off care products and polishing residues and for drying after washing the vehicle. Borderless due to a special weaving process to avoid scratches on sensitive surfaces. Reliably absorbs wax and polish residues and ensures a brilliant deep sheen without streaks, smudges or cloudiness. Washable and therefore extremely long-lasting. Silicone-free.

For wiping off care products and polishing residues as well as drying after washing the vehicle on all sensitive surfaces such as paintwork, Plexiglas, foiling, plastic, stainless steel or even sealed wood.

1 pc	6	21892 ¹³⁶
------	---	----------------------



Battery Clamp Grease

Special lime soap-based grease which is compatible with plastics. Protects battery terminals and electrical contacts from corrosion and oxidation. Ensures reliable starting as well as bright lights and longer battery life. Prevents acid damage, has good compatibility with plastics and prevents leakage currents. Prevents the contact resistance from increasing during operation and ensures lower loss than with untreated contacts. Labeling according to DIN 51502 K2G-30. Operating temperature range: -30 °C to +100 °C

Area of use

Used especially for battery terminals and connections in vehicle electronic systems.

Cont.

Packaging Unit

Part no.

10 g	50	3139 ¹⁵²
10 g	50	21941 ⁸⁹
50 g	12	3140 ¹⁴⁵
1 kg	4	3142 ¹³⁶

MAINTENANCE PRODUCTS FOR FILTERS



Motorbike Foam Filter Cleaner

Water-miscible cleaning concentrate specially formulated for air filters. Excellently dissolves dust, dirt and grease and cleans gently, without damage to the foam pores. Has high capacity and is therefore economical to use.

For all standard foam air filters in the 2 and 4-stroke range.

1 l	6	1299 ¹³⁶
-----	---	----------------------------



Motorbike Foam Filter Oil

Special oil for wetting foam air filters. Thanks to the outstanding adhesive properties of the liquid, sand and dust are reliably trapped in the filter, preventing greater wear on the engine. Increases engine service life. Water-repellent effect. Does not resinify or foam. The blue color when the filter is wetted helps to ensure uniform application.

Suitable for use on all 2-stroke and 4-stroke motorbikes with air or water-cooled engines using foam air filters.

500 ml	6	1625 ¹³⁴
1 l	6	3096 ¹³⁴



Motorbike Foam Filter Oil (Spray)

Specially developed aerosol for wetting foam and fabric air filters. Dust and dirt are reliably trapped even under extreme operating conditions and engine damage is thus avoided. Guarantees an optimal air flow and thus maximum engine output.

Suitable for use on all 2-stroke and 4-stroke motorcycles with air or water-cooled engines using foam or fabric air filters.

400 ml	6	1604 ¹³⁴
400 ml	6	5933 ¹⁰⁹
400 ml	6	20745 ¹⁶¹

BRAKE FLUIDS



Brake Fluid DOT 4

Synthetic brake fluid based on glycol ethers, alkyl polyglycols and glycol ether esters. It contains inhibitors to prevent the corrosion of metallic brake components and to reduce oxidation at increased temperatures. The brake fluid has a high wet and dry boiling point, thus ensuring safe braking even after the absorption of some moisture over an extended period of use. Special moisture scavengers help to prevent against the formation of vapor bubbles.

Specifications and approvals: FMVSS 116 DOT 3, FMVSS 116 DOT 4, ISO 4925 Class 3, ISO 4925 Class 4, SAE J 1703, SAE J 1704

Exceptionally well-suited for use with all disk and drum brake systems, as well as vehicle clutch systems for which a synthetic brake fluid of this specification is prescribed. The brake fluid is also suited for use in ABS brake systems.

250 ml	24	3091 ¹⁸⁸
250 ml	6	21155 ¹⁵²
500 ml	24	2885 ¹⁵⁶
500 ml	24	3093 ⁸⁸
500 ml	6	21156 ¹⁴⁶
1 l	12	2886 ¹⁵⁶
1 l	6	21157 ¹⁴⁶
5 l	4	2887 ¹⁵⁶
5 l	4	21158 ¹⁴⁶
20 l	1	21159 ¹³⁶



Brake Fluid SL6 DOT 4

Synthetic brake fluid based on glycol ethers and their boric acid esters. Has a high boiling point and wet boiling point, thus ensuring safe braking even after the absorption of some moisture over an extended period of use.

Specifications and approvals: FMVSS 116 DOT 3, FMVSS 116 DOT 4, ISO 4925 Class 6, SAE J 1703, SAE J 1704

LIQUI MOLY recommends this product for vehicles or assemblies for which the following specifications or original spare part numbers are required: Audi 501 14 (TL 766-Z), BMW QV 34 001, GM Europe GMW 3356, Seat 501 14 (TL 766-Z), Skoda 501 14 (TL 766-Z), VW 501 14 (TL 766-Z)

Exceptionally well-suited for use in hydraulic brake and clutch systems in vehicles for which a synthetic brake fluid is prescribed. Ideal for vehicles equipped with safety systems such as ESP/DSC, ABS and/or ASR.

250 ml	6	21166 ¹⁵²
500 ml	6	21167 ¹⁵²
1 l	6	21168 ¹⁴⁶
5 l	4	21169 ¹⁴⁶
20 l	1	21170 ¹³⁶
55 l	1	21171 ¹⁴⁶



Brake Fluid DOT 5.1

Synthetic brake fluid based on glycol ethers, alkyl polyglycols and polyglycol esters. It contains inhibitors to prevent the corrosion of metallic brake components and to reduce oxidation at increased temperatures. The brake fluid has an excellent wet and dry boiling point, thus ensuring safe braking even after the absorption of some moisture over an extended period of use. Special moisture scavengers help to prevent against the formation of vapor bubbles.

Specifications and approvals: FMVSS 116 DOT 3, FMVSS 116 DOT 4, FMVSS 116 DOT 5.1, ISO 4925 Class 3, ISO 4925 Class 4, ISO 4925 Class 5.1, SAE J 1703, SAE J 1704

Exceptionally well-suited for use with all disk and drum brake systems, as well as vehicle clutch systems for which a synthetic brake fluid of this specification is prescribed. The brake fluid is also ideally suited for use in ABS brake systems.

250 ml	24	3092 ¹⁸⁸
250 ml	6	21160 ¹⁵²
500 ml	6	21161 ¹⁴⁶
1 l	6	21162 ¹⁴⁶
5 l	4	21163 ¹⁴⁶
20 l	1	21164 ¹³⁶
55 l	1	21165 ¹⁴⁶

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.



Radiator Antifreeze KFS 11

Radiator antifreeze based on ethylene glycol. Combination of active agents formulated using a special selection of inhibitors based on hybrid technology. Provides outstanding protection against frost, corrosion and overheating, and does not contain amines, nitrites or phosphates. If mixed with water in the right ratio, ensures reliable vehicle performance all year round.

LIQUI MOLY recommends this product for vehicles or assemblies for which the following specifications or original spare part numbers are required: Alfa Romeo 9.55523, Audi TL-774 C = G11, Behr, BMW GS 94000, Chrysler MS-7170, Cummins 85T8-2, Deutz DQC CA-14, Fiat 9.55523, IVECO 18-1830, JI Case JIC-501, Lada/Avtovaz TTM VAZ 1.97.717-97, Lancia 9.55523, MAN 324 Typ NF, MB 325.0, MB 325.2, MTU MTL 5048, Opel/GM GME L 46014, Perkins, Porsche TL-774 C = G11, Saturn, Seat TL-774 C = G11, Skoda TL-774 C = G11, Tesla, Toyota Motor Corporation, Vauxhall GMEL1301, Volkswagen TL-774 C = G11, Volvo Cars 128 6083 / 002, Volvo Construction, Volvo Trucks

Area of use

For all cooling systems and engines, in particular aluminum high-performance engines in passenger cars (both with combustion engines as well as hybrid and battery electric vehicles), commercial vehicles, motorcycles, buses, agricultural and construction machinery as well as stationary engines and equipment that require cooling system protection of this quality.

Cont.	Packaging Unit	Part no.
1 l	12	1380 ²
1 l	6	21149 ¹⁵²
5 l	4	21150 ¹³⁶
20 l	1	21127 ¹³⁶
60 l	1	21128 ¹⁴⁶
200 l	1	21129 ¹⁴⁶



Radiator Antifreeze KFS 12+

Radiator antifreeze based on ethylene glycol. Combination of active agents with an OAT inhibitor package specially developed for modern aluminum high-performance engines. Does not contain amines, borates, nitrites, phosphates or silicates and provides outstanding protection against frost, rust and overheating. If mixed with water in the right ratio, ensures reliable vehicle performance all year round.

LIQUI MOLY recommends this product for vehicles or assemblies for which the following specifications or original spare part numbers are required: ADE, Aston Martin, Audi TL-774 D = G12, Audi TL-774 F = G12+, Behr, Bergen Engines 2.13.01, CASE New Holland MAT 3624, Caterpillar / MAK, Caterpillar GCM34, Caterpillar MWM 0199-99-2091/12, Chevrolet, Claas, Cummins CES 14439, Cummins CES 14603, Cummins IS series u N14, DAF74002, Detroit DFS93K217, Deutz DQC CB-14, Fendt, Fiat 9.55523, Ford WSS-M97 B44-D, Foton Q-FPT 2313005-2013, Great Wall, Hitachi, Irisbus Karosa, Isuzu, Jaguar CMR 8229, Jaguar / Land Rover STJLR.651.5003, Jenbacher TA 1000-2000, John Deere JDM H5, Kobelco, Komatsu 07.892 (2009), Land Rover, Lancia 9.55523, Leyland Trucks DW03245403, Liebherr MD1-36-130, Mack 014 GS 17009, MAN 324 Typ SNF, MAN B&G A/S, MAN B&W AG D36 5600, MAN Diesel & Turbo SE, Mazda MEZ MN 121 D, MB 325.3, Mitsubishi Heavy Industry (MHI), MTU MTL 5048, Opel/GM GMW 3420, Proton, Renault-Nissan Renault RNUR 41-01-001/--S Type D, Renault Trucks 41-01-001/--S Type D, Saab B040 1065, Santana Motors, Saturn, Seat TL-774 D = G12, Seat TL-774 F = G12+, Skoda TL-774 D = G12, Skoda TL-774 F = G12+, Skoda 61-0-0257, Suzuki, Tedom, Thermo King, Valtra, Van Hool, Vauxhall GMW 3420, Volkswagen Semt Pielstick, Volkswagen TL-774 D = G12, Volkswagen TL-774 F = G12+, Volvo Construction, Volvo Penta, Volvo Trucks, Wärtsilä 32-9011, Wärtsilä SAMC Diesel DLP799861, Waukesha, Yanmar

For all cooling systems and engines, in particular aluminum high-performance engines in passenger cars (both with combustion engines as well as in hybrid vehicles and battery electric vehicles), commercial vehicles, motorcycles, buses, agricultural and construction machinery as well as stationary engines and equipment that require cooling system protection of this quality. Particularly suitable for engines of the latest generation.

1 l	12	1381 ²
1 l	6	21145 ¹⁴⁶
5 l	4	21146 ¹³⁶
20 l	1	21138 ¹³⁶
60 l	1	21147 ¹⁴⁶
200 l	1	21148 ¹⁴⁶



Coolant Ready Mix RAF 12+


Premixed product based on ethylene glycol. Antifreeze that does not contain amines, nitrites, phosphates, borates or silicates and offers outstanding protection against frost, corrosion and overheating thanks to its OAT inhibitor package specially developed for modern aluminum high-performance engines. Enables safe, year-round vehicle operation.

LIQUI MOLY recommends this product for vehicles or assemblies for which the following specifications or original spare part numbers are required: ADE, Aston Martin, Behr, Bergen Engines 2.13.01, CASE New Holland MAT 3624, Caterpillar / MAK, Caterpillar GCM34, Caterpillar MWM 0199-99-2091/12, Chevrolet, Claas, Cummins CES 14439, Cummins CES 14603, Cummins IS series u N14, DAF74002, Detroit DFS93K217, Deutz DQC CB-14, Fendt, Fiat 9.55523, Ford WSS-M97 B44-D, Foton Q-FPT 2313005-2013, Great Wall, Hitachi, Irisbus Karosa, Isuzu, Jaguar CMR 8229, Jaguar / Land Rover STJLR.651.5003, Jenbacher TA 1000-2000, John Deere JDM H5, Kobelco, Komatsu 07.892 (2009), Land Rover, Lancia 9.55523, Leyland Trucks DW03245403, Liebherr MD1-36-130, Mack 014 GS 17009, MAN B&G A/S, MAN B&W AG D36 5600, MAN Diesel & Turbo SE, Mazda MEZ MN 121 D, Mitsubishi Heavy Industry (MHI), MTU MTL 5048, Opel/GM GMW 3420, Proton, Renault-Nissan Renault RNUR 41-01-001/--S Type D, Renault Trucks 41-01-001/--S Type D, Saab B040 1065, Santana Motors, Saturn, Suzuki, Tedom, Thermo King, Valtra, Van Hool, Vauxhall GMW 3420, Volvo Construction, Volvo Penta, Volvo Trucks, Wärtsilä 32-9011, Wärtsilä SAMC Diesel DLP799861, Waukesha, Yanmar

For all cooling systems and engines, particularly aluminum high-performance engines, in cars, commercial vehicles, motorcycles, buses, agricultural machinery as well as stationary engines and equipment that require cooling system protection of this quality. Particularly suitable for engines of the latest generation.

1 l	12	6924 ¹⁴⁶
5 l	4	8810 ¹³⁶
20 l	1	8811 ¹³⁶
200 l	1	8812 ¹³⁶

For specifications and manufacturers' approvals, see the oil guide or technical data sheet. Comply with the vehicle or aggregate manufacturer's instructions.

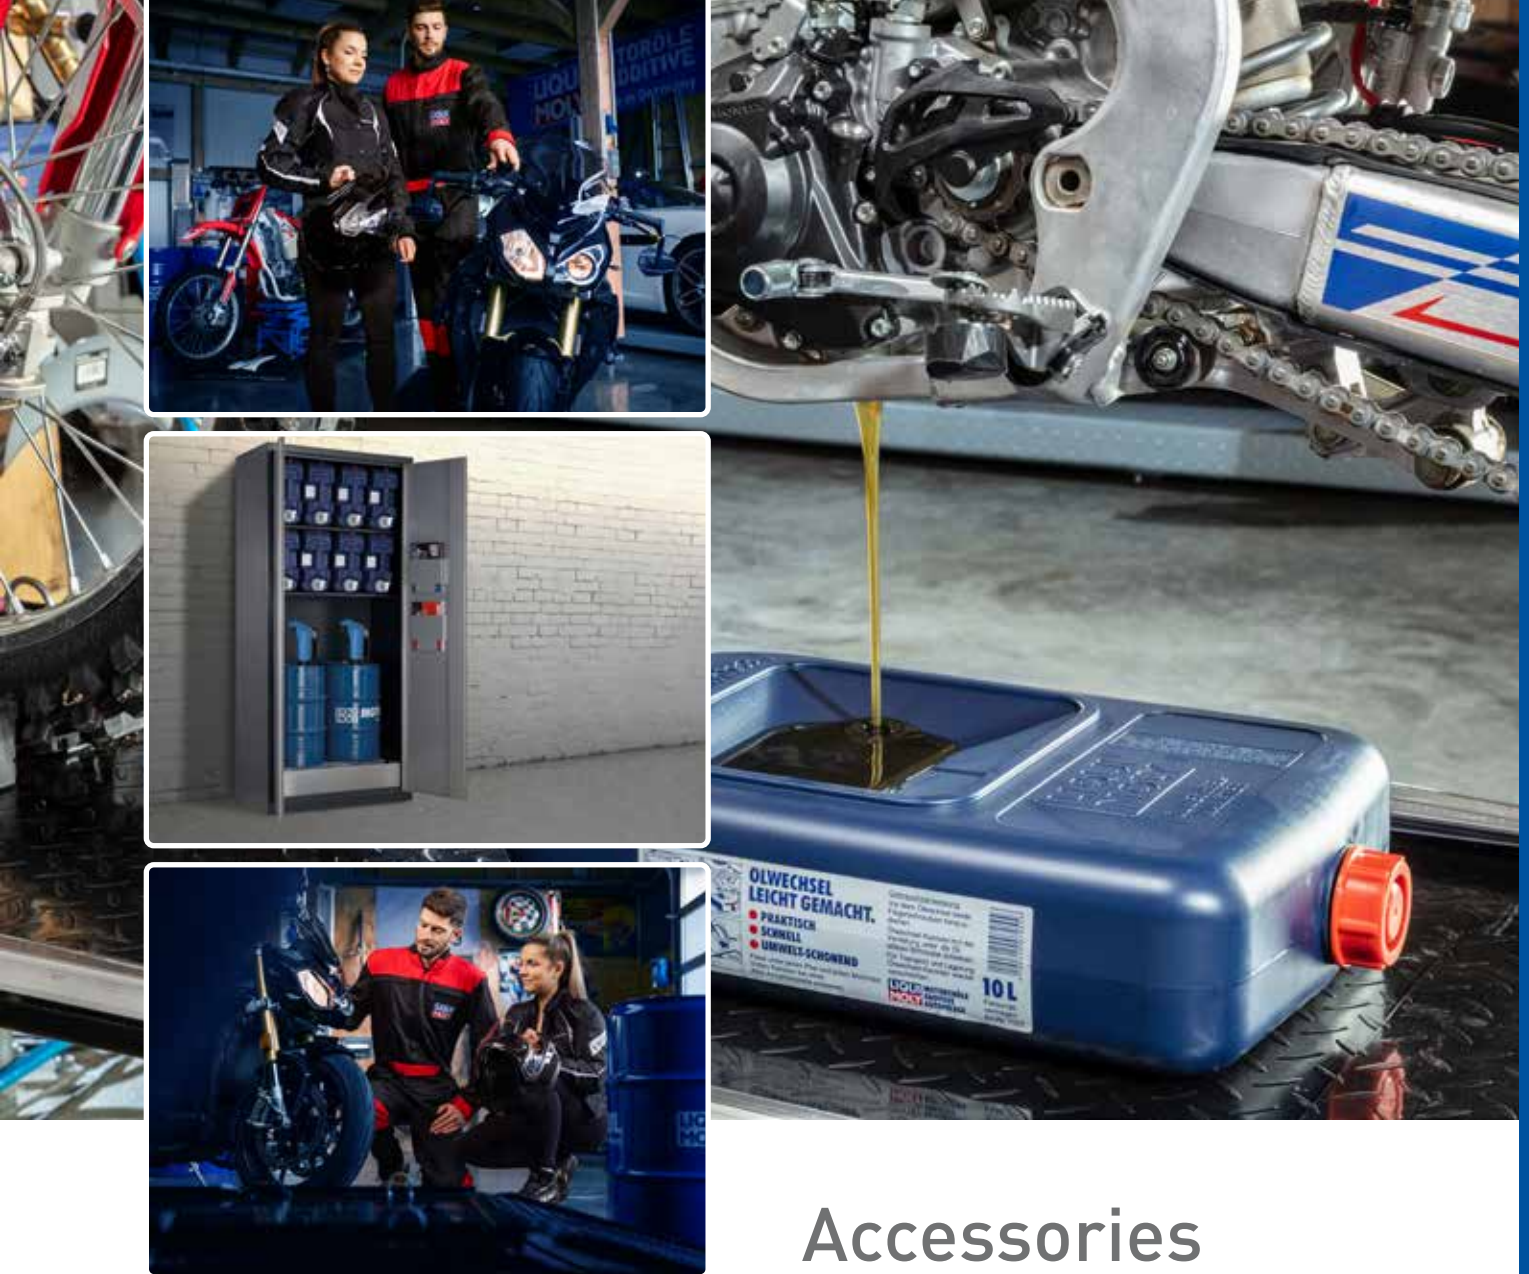

Accessories



Motorbike oil cabinet
For 20 l and 1 l container from LIQUI MOLY consisting of 3 x 20 l canister and 3 x 6-pack units of the 1 l motorcycle oil canisters (as desired)
• dimensions: 950 x 630 x 550 mm (H x W x D)
• weight: 52 kg
• color: Body RAL 7016, doors 9006

Area of use	Cont.	Packaging Unit	Part no.
Oil cabinet for clearly arranged and clean storage of motorcycle oils. With integrated drip pan.	1 pc	1	29034 ¹⁴⁶



Oil Drip Pan
For 2 drums up to 205 l
• TÜV type-tested
• dimensions: 1,200 x 800 x 360 mm (L x W x H)
• weight: 76 kg

For environmentally friendly storage of drums.	1 pc	1	7812 ¹⁵²
------------------------------------------------	------	---	---------------------



Oil Change Canister
• capacity 10 l
• separate venting screw
• suitable for passenger cars and motorcycles
• including sieve
• dimensions: 57 x 32 x 13 cm (L x W x H)

For environmentally friendly do-it-yourself oil change without lifting platform.	1 pc	4	7055 ¹⁵²
----------------------------------------------------------------------------------	------	---	---------------------



Sales promotion



Topper Futura-Plastic-Rack Motorbike
Part no. 50160

Motorbike Futura-Plastic-Rack*
empty
width: 60 cm
depth: 40 cm
height: 160 cm
Part no. 9989

Side sections for Futura-Plastic-Rack
(2 pieces)
Part no. 5247



Topper Counter Display Motorbike
Part no. 9925

Counter Display LIQUI MOLY*
Part no. 9965


Shooter 4our/6ix Box
Part no. 20406



Poster Beta World Champion DIN A1
Part no. 50565



Advertising Board „Motorbike“
594 x 745 mm
Part no. 9911



Sticker Oil Change Motorbike
Part no. 50851




Motorbike Sticker
Part no. 8543

Sticker Motorbike-Logo + Slogan
60 x 50 mm, Part no. 52766
135 x 110 mm, Part no. 52767



Topper Tego-Metal-Rack Motorbike, Part no. 9603

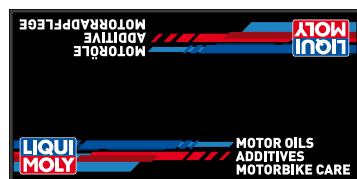

Motorbike Mat
(100 x 200 cm)
Part no. 52778



End User Brochure Motorbike
Part no. 52635



Banner Motorbike (400 x 100 cm)
Part no. 51994

Motorbike oil cabinet
Part no. 29034

LIQUI MOLY
special development



For 20 liter and 1 liter LIQUI MOLY containers.



Beach flag base
Part no. 50229



Beach flag Motorbike 300 cm
Part no. 51998



Flag Motorbike
(150 x 360 cm)
Part no. 51991

*Standard pallet contents can be viewed upon request or in the Internet. Custom pallet contents are also possible.



teamshop.liqui-moly.com



Only available for order within the EU.



The LIQUI MOLY Shop offers you the opportunity of ordering economical company, recreation and work clothing as well as team sport equipment. All articles bear the LIQUI MOLY logo, because LIQUI MOLY helps support this offer. This gives us the opportunity of offering you extremely attractive purchasing conditions. We will also be happy to add your company logo to your company, recreation and work clothing in addition to the LIQUI MOLY logo.



A series of horizontal lines for taking notes, spanning the width of the page below the header.



Moto2 | **LIQUI MOLY**
EXCLUSIVE LUBRICANT

Moto3 | **LIQUI MOLY**
EXCLUSIVE LUBRICANT



Excellent quality – on both race circuit and road

Whether as the exclusive lubricant supplier to the Moto2 and Moto3 racing series or as seven-time winner in the Oils and Lubricants category of MOTORRAD's readers' polls or as seven-time winner of PS Sport Motorrad magazine – the top quality of LIQUI MOLY delights professionals and recreational riders all across the board.



Scan the QR code to find the best oil
recommended for your Motorbike:

www.liqui-moly.com

MOTORRAD
BEST BRAND 2025

Kategorie:
Öle/Schmiermittel

Ausgabe 9/2025



BEST BRAND 2025
Kategorie: Öle/Schmierstoffe

Ausgabe 7/2025



LIQUI MOLY GmbH
Jerg-Wieland-Straße 4
89081 Ulm
GERMANY

Phone: +49 731 1420-0
Fax: +49 731 1420-75
E-Mail: info@liqui-moly.de
www.liqui-moly.com

Technical Support:
Telefon: +49 731 1420-871
E-Mail: support@liqui-moly.com

No liability for misprints.
Subject to technical modifications.



facebook.com/liquimoly



instagram.com/liquimoly



LIQUIMOLYwebTV

The free LIQUI MOLY App:



The quick way to find
the right oil

liqui-moly.to/AppStore
liqui-moly.to/PlayStore



Additional information
and the right operating
fluids for your
vehicle can be found
here!



BEST BRAND 2025

Kategorie: Öle/Schmierstoffe

MOTORRAD

BEST BRAND 2025

Kategorie:
Öle/Schmiermittel

Ausgabe 7/2025

Ausgabe 9/2025

505752507